


# CAJO

Cajo MakeBright™

## CAJO TAILOR CO2™ - COST-EFFICIENT MARKING UNIT FOR ORGANIC MATERIALS

### CAJO TAILOR CO2™

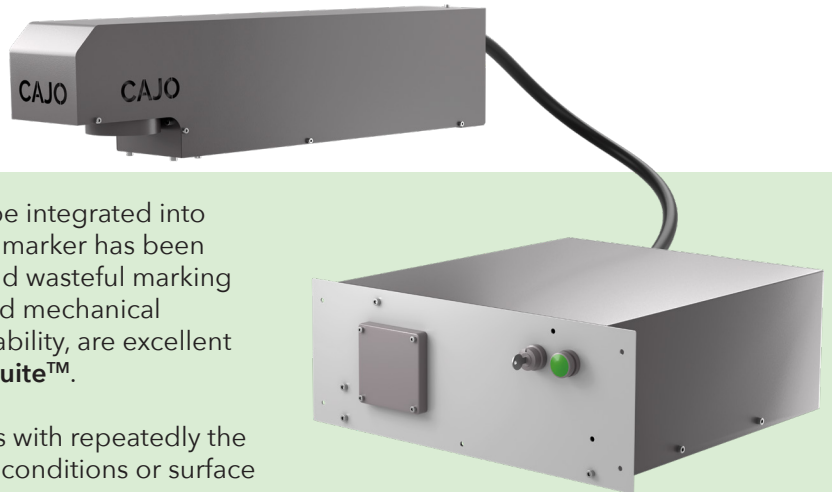

Cajo Tailor CO2™ is a laser marking unit that can be integrated into a production line or into a device. The robust laser marker has been designed to cost-efficiently replace all outdated and wasteful marking methods, such as inkjets. The system's electrical and mechanical integrability, as well as the user experience and usability, are excellent thanks to Cajo's own laser marking software, **CajoSuite™**.

Cajo Tailor™ enables precise and durable markings with repeatedly the same high quality regardless of the environmental conditions or surface structure.

Cajo Tailor CO2™ is suitable for the permanent marking of **plastic, glass, stone, wood, leather, and other organic materials**. Easy-to-use marking software CajoSuite™ makes the design and customization of marking content easy and flexible.

The intelligent software makes it possible to add variable marking information, such as logos, serial numbers, barcodes, QR and data matrix codes, and other product information. Cajo Tailor CO2™ is one of the longest-lasting marking machines on the market.

Choose Cajo for cost-efficient product marking.



### CONTACT INFORMATION

Rasivainiontie 8  
FI-90440  
Kempele, FINLAND  
+358 10 583 5020  
info@cajotechnologies.com

CAJOTECHNOLOGIES.COM



## CAJO SOFTWARE SOLUTIONS POWER YOUR PRODUCTION

### CAJOSUITE™

### CAJOSMART™

Cajo Technologies combines laser control and software solutions for optimal marking results. Cajo's cutting-edge technology offers a high-performing solution to any production environment and application needs.



#### THE BEST PROCESS CONTROL ON THE MARKET

- High-quality marking on the fly for time-critical production lines
- Precise and fast control of the laser marking process
- High-quality markings
- Versatile and easy-to-use product marking software
- Connectivity to other processes

Product marking has never been more efficient than with the cutting-edge laser marking software designed by Cajo Technologies.

CajoSuite™ is a comprehensive and easy-to-use software for laser marking. The flexible software contains features for designing markings and variables for full traceability and product identification. The user-friendly software offers a simple user interface for operators. The software has two modes, **Design Mode**, and **Production Mode**.



CajoSmart™ is an embedded software designed for high-speed and time-critical manufacturing processes. CajoSmart™ enables synchronized control of several marking heads at the same time. This revolutionary solution provides first-class laser markings in a hectic manufacturing environment. No PC is needed on the production floor thanks to Cajo's embedded onboard control system.



POWERFUL CONTROL BOARD AND INTELLIGENT SOFTWARE



HIGH-QUALITY, PRECISE AND PERMANENT MARKINGS



LOW RUNNING COST, SHORT PAYBACK TIME



SUSTAINABLE TECHNOLOGY WITHOUT ADDITIVES



FAST MARKING ON THE FLY FOR MASS PRODUCTION LINES



VERIFIED MARKING PARAMETERS FOR 4 000+ MATERIALS

#### TRADEMARK

All trademarks are the property of Cajo Technologies Ltd. All rights reserved. Information contained herein is subject to change without notice. No part of this Data Sheet may be reproduced in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Cajo Technologies Ltd. Cajo Technologies Ltd. retains ownership and all other rights of all drawings, models, shapes, solutions, ideas, or any kind of industrial property rights presented or expressed in this Data Sheet. All other use of the material presented or expressed in this Data Sheet except for getting acquainted with, quoting, ordering, or using in business otherwise involving Cajo Technologies Ltd. is strictly prohibited.

CAJOTECHNOLOGIES.COM



## TECHNICAL DATA (METRIC SYSTEM)

Laser type	CO2-laser
Wavelength	10 600 nm
Laser class	Class 4
Laser power	30 W / 120 W
Beam guiding	High-speed optical galvanometers
Marking speed (max)	500 characters/s or 7 m/s Can be upgraded up to 1000 characters/s or 14 m/s
Preview system	Available as an option
Marking field:	
30 W	100 x 100 / 140 x 140 / 175 x 175 mm
120 W	100 x 100 / 140 x 140 / 175 x 175 / 520 x 520 mm
<b>Max size for the markable part</b>	<b>Scalable</b>
Cooling	Air
Power supply	110-240 V / 50-60 Hz
Power consumption:	
30 W	600W
120 W	1700W
Marking software	CajoSuite™ CajoSmart™
<b>Dimensions and weights (H x W x L)</b>	
30 W	Device enclosure 178 x 482 x 560 mm (10 kg)
120 W	Marking head 174 x 200 x 628 mm (15 kg)
Ambient conditions	Marking head 192 x 225 x 928 mm (25 kg)
Connectivity	15-35 °C, humidity ≤80 % I/O: 6 x IN 24 VDC, 6 x OUT 24 VDC 1 x RS-422 (incremental encoder input) 1 x LAN (for control)
Safety interlock	Duplicated safety contacts with feedback
<b>Computer recommendations</b> (not included in standard delivery)	
Processor	Intel i5
Memory	4 GB
Hard drive	64 GB
Operation system	Windows 7 / Windows 10 / Windows 11
Interfaces	1 x LAN

### TRADEMARK

All trademarks are the property of Cajo Technologies Ltd. All rights reserved. Information contained herein is subject to change without notice. No part of this Data Sheet may be reproduced in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Cajo Technologies Ltd. Cajo Technologies Ltd. retains ownership and all other rights of all drawings, models, shapes, solutions, ideas, or any kind of industrial property rights presented or expressed in this Data Sheet. All other use of the material presented or expressed in this Data Sheet except for getting acquainted with, quoting, ordering, or using in business otherwise involving Cajo Technologies Ltd. is strictly prohibited.

CAJOTECHNOLOGIES.COM



## TECHNICAL DATA (IMPERIAL SYSTEM)

Laser type	CO2-laser
Wavelength	10 600 nm
Laser class	Class 4
Laser power	30 W / 120 W
Beam guiding	High-speed optical galvanometers
Marking speed (max)	500 characters/s or 23 feet/s Can be upgraded up to 1000 characters/s or 46 feet/s
Preview system	Available as an option
Marking field:	
30 W	3.9 x 3.9 / 5.5 x 5.5 / 6.9 x 6.9 in
120 W	3.9 x 3.9 / 5.5 x 5.5 / 6.9 x 6.9 / 20.5 x 20.5 in
<b>Max size for the markable part</b>	<b>Scalable</b>
Cooling	Air
Power supply	110-240 V / 50-60 Hz
Power consumption:	
30 W	600W
120 W	1700W
Marking software	CajoSuite™ CajoSmart™
<b>Dimensions and weights (H x W x L)</b>	
30 W	Device enclosure 7.0 x 19.0 x 22.0 in (22.0 lb)
120 W	Marking head 6.9 x 7.9 x 24.7 in (33.1 lb)
Ambient conditions	Marking head 7.6 x 8.9 x 36.5 in (55.1 lb)
Connectivity	59-95 °F, humidity ≤80 % I/O: 6 x IN 24 VDC, 6 x OUT 24 VDC 1 x RS-422 (incremental encoder input) 1 x LAN (for control)
Safety interlock	Duplicated safety contacts with feedback
<b>Computer recommendations</b> (not included in standard delivery)	
Processor	Intel i5
Memory	4 GB
Hard drive	64 GB
Operation system	Windows 7 / Windows 10 / Windows 11
Interfaces	1 x LAN

### TRADEMARK

All trademarks are the property of Cajo Technologies Ltd. All rights reserved. Information contained herein is subject to change without notice. No part of this Data Sheet may be reproduced in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Cajo Technologies Ltd. Cajo Technologies Ltd. retains ownership and all other rights of all drawings, models, shapes, solutions, ideas, or any kind of industrial property rights presented or expressed in this Data Sheet. All other use of the material presented or expressed in this Data Sheet except for getting acquainted with, quoting, ordering, or using in business otherwise involving Cajo Technologies Ltd. is strictly prohibited.

CAJOTECHNOLOGIES.COM

